



ITALSEAL s.r.l.

Via Damiano Chiesa 3/A - Cernusco sul naviglio MI - Italy

Phone +39.02.35.99.90.46 - E-mail info@italseal.it


Type 202
Type 208

OPERATING CONDITIONS

Pressure: $P = -0.05 \sim 0.16 \text{MPa}$

Temperature: $t = -20^\circ\text{C} \sim 80^\circ\text{C}$

Speed: $n \leq 3000 \text{r/min}$

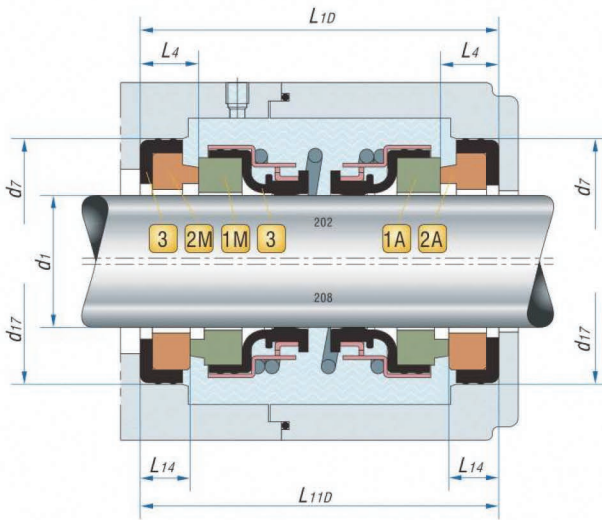

COMBINED MATERIALS

- 1A Rotary Face: Carbon/SiC
- 2A Stationary Seat: Ceramic/SiC
- 1M Rotary Face: Carbon/SiC/TC
- 2M Stationary Seat: Ceramic/SiC/TC
- 3 Flexible Member: NBR/VITON

202 DIMENSIONAL DATA (mm)

(Size) (Specification)	d1 (h6)	d3 (Max)	d7 (H8)	L10 (±0.5)	L4
202-14	14	25.5	26/28	38/42	7.0
202-16	16	27.5	28/30	38/45	7.0
202-17	17	32.5	34/35	38/43/48	7.0
202-18	18	32.5	34/35	38/43/48	7.0
202-20	20	33.0	36	40/42/47	7.0
202-22	22	38.0	38	45	7.0
202-25	25	40.0	41	51	9.0
202-30	30	45.5	46	51	9.0
202-35	35	51.0	51	51	9.0
202-40	40	57.5	60	61	10.5
202-45	45	63.0	65	61	10.5

208 DIMENSIONAL DATA (mm)

(Size) (Specification)	d1 (h6)	d3 (Max)	D17 (H8)	L110 (±0.5)	L14
208-10	10	21.0	21	30	5.3
208-12	12	23.0	23/24/26	32	5.3
208-14	14	25.5	25/26/28	35/38/42	5.3
208-15	15	27.5	27/28/30	38/45	5.3
208-16	16	27.5	27/28/30	38/45	5.3
208-17	17	32.5	33/34/35	38/43/48	5.3
208-18	18	32.5	33/34/35	38/43/48	5.3
208-20	20	33.0	35/36	40/42/47	5.8
208-22	22	38.0	37/38	45	6.2
208-25	25	40.0	40/41	48/51	7.5
208-28	28	43.0	43	51	8.0
208-30	30	45.5	45	51	8.0
208-35	35	51.0	50	51	8.0
208-40	40	57.5	58	61	9.5
208-45	45	63.0	63	61	9.5