

Type 102

OPERATING CONDITIONS

Pressure: $P=0\sim 0.3\text{MPa}$
Temperature: $t=-20^{\circ}\text{C}\sim 80^{\circ}\text{C}$
Speed: $n\leq 3000\text{r/min}$


COMBINED MATERIALS

- 1 Rotary Face: Ceramic
- 2 Stationary Seat: Ceramic
- 3 Flexible Member: NBR



102 DIMENSIONAL DATA (mm)

(Size) (Specification)	d ₁ (h6)	d ₃ (Max)	d ₇ (H8)	L ₃ (±0.5)	L ₄	L ₇
102-14	14	33	35	17.5	7	13
102-18	18	37	40	17.5	7	13
102-20	20	38	40	18.0	7	15

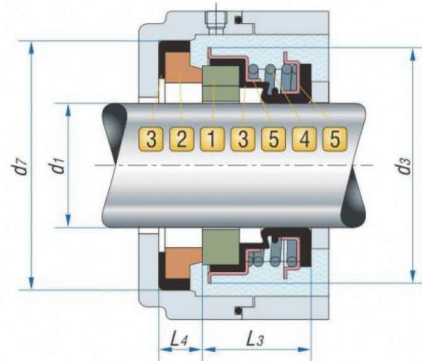

Type 103/ 103A

OPERATING CONDITIONS

Pressure: $P=0\sim 0.4\text{MPa}$
Temperature: $t=-20^{\circ}\text{C}\sim 120^{\circ}\text{C}$
Speed: $n\leq 3000\text{r/min}$

COMBINED MATERIALS

- 1 Rotary Face: Carbon/Ceramic/SiC
- 2 Stationary Seat: Ceramic/SiC
- 3 Flexible Member: NBR/EPDM



103/ 103A DIMENSIONAL DATA (mm)

(Size) (Specification)	d ₁ (h6)	d ₃ (Max)	d ₇ (H8)	L ₃ (±0.5)	L ₄	L ₂₃ (±0.5)	L ₂₄
103-10	10	22.0	26	15.0	5.5	15.5	5.0
103-12	12	23.5	26	15.0	5.5	15.5	5.0
103-12L	12	23.5	26	15.0	8.0	15.0	8.0
103-14	14	27.0	30	13.5	7.0	15.0	5.5
103-17	17	30.0	35	14.0	7.0	15.2	5.8
103-18	18	30.0	35	14.0	7.0	15.2	5.8

