



Type 108

OPERATING CONDITIONS

Pressure: $P=0\sim 0.6\text{MPa}$

Temperature: $t=-20^{\circ}\text{C}\sim 150^{\circ}\text{C}$

Velocity: $V_g \leq 8\text{m/s}$

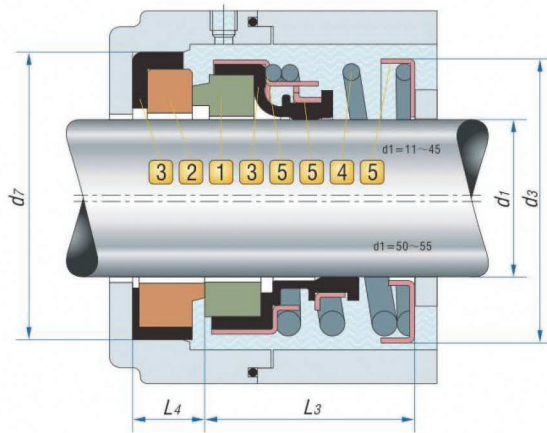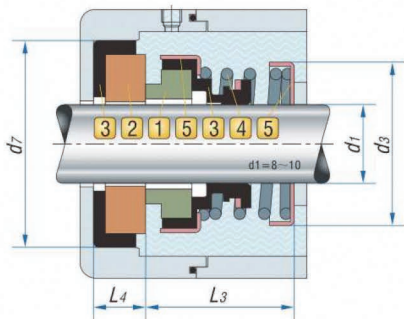

108 DIMENSIONAL DATA (mm)

(Size) (Specification)	d ₁ (h6)	d ₃ (Max)	d ₇ (H8)	L ₃ (±0.5)	L ₄
108-8	8	17.0	15	14.7	5.3
108-8L	8	17.0	21	14.7	5.3
108-9	9	21.0	21	14.7	5.3
108-10	10	21.0	21	14.7	5.3
108-11	11	23.0	24	14.7	5.3
108-12	12	23.0	26	14.7	5.3
108-14	14	25.5	26	19.7	5.3
108-15	15	27.5	27	19.7	5.3
108-16	16	27.5	27	19.7	5.3
108-17	17	32.5	33	19.7	5.3
108-17L	17	32.5	35	19.7	5.3
108-18	18	32.5	33	19.7	5.3
108-19	19	33.0	35	19.2	5.8
108-20	20	33.0	35	19.2	5.8
108-22	22	38.0	37	21.8	6.2
108-25	25	40.0	40	25.0	7.5
108-28	28	43.0	43	27.0	8.0
108-30	30	45.5	45	27.0	8.0
108-35	35	51.0	50	29.0	8.0
108-40	40	57.5	58	30.5	9.5
108-45	45	63.0	63	30.5	9.5
108-50	50	71.0	70	33.5	11.5
108-55	55	75.5	75	33.5	11.5

COMBINED MATERIALS

- 1 Rotary Face: Carbon/Ceramic/SiC/TC
- 2 Stationary Seat: Ceramic/SiC/TC
- 3 Flexible Member: NBR/VITON/EPDM
- 4 Spring: Carbon Steel/Stainless Steel
- 5 Metal Parts: Stainless Steel