

Type 156

OPERATING CONDITIONS

Pressure: $P=0\sim 0.4\text{MPa}$
Temperature: $t=-20^{\circ}\text{C}\sim 80^{\circ}\text{C}$
Velocity: $V_g\leq 10\text{m/s}$


COMBINED MATERIALS

- 1 Rotary Face: Carbon
- 2 Stationary Seat: Ceramic
- 3 Flexible Member: NBR



156 DIMENSIONAL DATA (mm)

(Size) (Specification)	d ₁ (h6)	d ₃ (Max)	d ₇ (H8)	L ₃ (±0.5)	L ₄
156-8	8	16.0	18	11.5	6.5
156-9	9	20.0	21	16.5	6.5
156-10	10	20.0	22	16.5	6.5
156-11	11	20.0	24	16.5	6.5
156-12	12	22.5	26	17.5	6.5
156-13	13	22.5	26	17.0	7.0
156-14	14	24.5	28	18.0	7.0
156-15	15	24.5	28	18.0	7.0
156-16	16	28.5	32	19.0	8.0

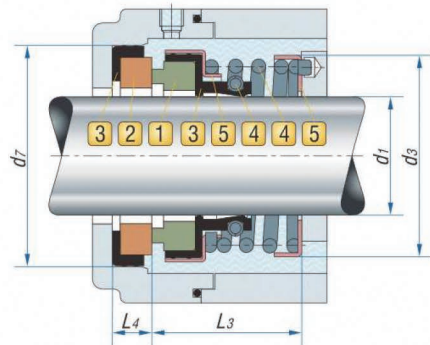

Type XB

OPERATING CONDITIONS

Pressure: $P=0\sim 0.4\text{MPa}$
Temperature: $t=-20^{\circ}\text{C}\sim 120^{\circ}\text{C}$
Speed: $n\leq 3000\text{r/min}$

COMBINED MATERIALS

- 1 Rotary Face: Ceramic/SiC
- 2 Stationary Seat: Carbon/SiC
- 3 Flexible Member: NBR/VITON



XB DIMENSIONAL DATA (mm)

(Size) (Specification)	d ₁ (h6)	d ₃ (Max)	d ₇ (H8)	L ₃ (±0.5)	L ₄
XB-25	25	50.0	41.0	30.0	12.0
XB-30	30	56.5	47.5	30.0	12.0
XB-35	35	63.5	53.0	32.2	12.5

