


Type 560A

OPERATING CONDITIONS

Pressure: $P = 0 \sim 1.5 \text{ MPa}$

Temperature: $t = -20^\circ\text{C} \sim 150^\circ\text{C}$

Velocity: $Vg \leq 13 \text{ m/s}$

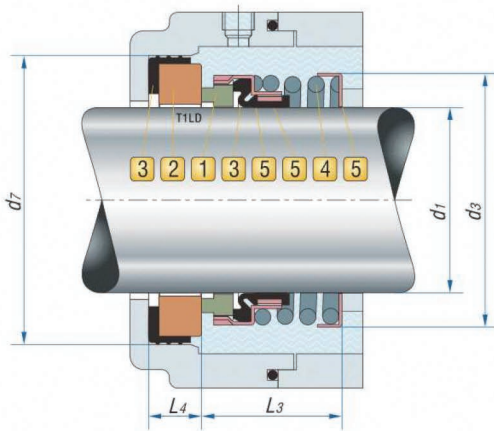

COMBINED MATERIALS

- 1 Rotary Face: Carbon/SiC
- 2 Stationary Seat: Ceramic/SiC/TC
- 3 Flexible Member: NBR/VITON/EPDM
- 4 Spring: Stainless Steel
- 5 Metal Parts: Stainless Steel

560A DIMENSIONAL DATA (mm)

(Size) (Specification)	d ₁ (h6)	d ₃ (Max)	d ₇ (H8)	L ₃ (±0.5)	L ₄
560A-8	8	20.5	21.0	11.5	6.5
560A-9	9	20.5	24.0	16.5	6.5
560A-10	10	20.5	24.0	16.5	6.5
560A-11	11	22.5	24.0	16.5	6.5
560A-12	12	22.5	26.0	17.5	6.5
560A-13	13	24.5	26.0	17.5	6.5
560A-14	14	24.5	28.0	18.5	6.5
560A-15	15	26.5	28.0	18.5	6.5
560A-16	16	26.5	32.0	20.0	7.0
560A-17	17	26.5	32.0	20.0	7.0
560A-18	18	30.5	35.0	20.0	7.0
560A-19	19	30.5	35.0	20.0	7.0
560A-20	20	34.0	38.0	19.5	8.5
560A-22	22	36.0	40.0	19.5	8.5
560A-24	24	40.0	44.0	20.5	8.5
560A-25	25	40.0	44.0	20.5	8.5
560A-28	28	42.0	46.0	21.0	9.0
560A-30	30	45.0	50.0	22.0	9.0

560A DIMENSIONAL DATA (mm)

(Size) (Specification)	d ₁ (h6)	d ₃ (Max)	d ₇ (H8)	L ₃ (±0.5)	L ₄
560A-32	32	47.0	54.0	24.0	9.0
560A-35	35	50.0	58.0	25.5	10.5
560A-38	38	55.0	60.0	26.5	10.5
560A-40	40	57.0	64.0	27.0	11.0
560A-45	45	61.5	66.0	29.0	11.0
560A-48	48	65.5	67.0	31.0	11.0
560A-50	50	67.5	72.0	31.0	11.0
560A-54	54	72.0	76.2	42.8	14.2
560A-55	55	72.0	79.4	42.8	14.2
560A-58	58	78.5	79.4	42.8	14.2
560A-60	60	80.0	82.5	45.8	14.2
560A-65	65	84.5	85.7	49.0	16.0
560A-70	70	90.0	88.9	49.0	16.0
560A-73	73	94.0	95.3	53.0	16.0
560A-75	75	99.0	98.4	53.0	16.0