

Type 6C

OPERATING CONDITIONS

Pressure: $P=0\sim 0.3\text{MPa}$

Temperature: $t=-20^{\circ}\text{C}\sim 100^{\circ}\text{C}$

Speed: $n\leq 5000\text{r/min}$

COMBINED MATERIALS

1 Rotary Face: Ceramic/SiC


2 Stationary Seat: Carbon/SiC

3 Flexible Member: NBR/HNBR



6C Dimensional Data(mm)

(Specification)	(Size) d1 (h6)	d3	D2 (H8)	D4	A (± 0.30)	C (Max)
6C-12	12	25	30.00	35.0	9.7	8.0
6C-12S	12	25	28.58	32.0	9.7	8.0
6C-12L	12	25	33.40	38.0	8.4	6.7
6C-13	13	25	30.00	35.0	9.7	8.0
6C-15	15	30	36.50	41.5	11.5	8.5
6C-16	16	30	36.50	41.5	11.5	8.5
6C-16L	16	30	38.10	41.5	11.5	8.5
6C-20S	20	37	38.00	43.7	12.5	9.5
6C-20	20	37	40.00	43.7	12.5	9.5

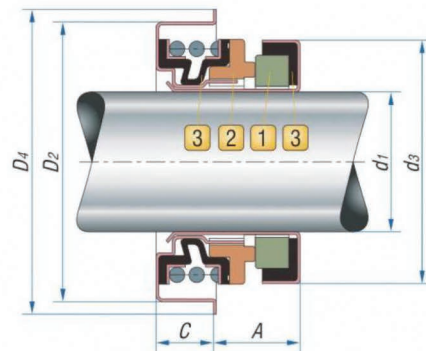


Type 6CF-16

OPERATING CONDITIONS

Pressure: $P=0\sim 0.3\text{MPa}$

Temperature: $t=-20^{\circ}\text{C}\sim 100^{\circ}\text{C}$

Speed: $n\leq 5000\text{r/min}$




Type 6CH-16

OPERATING CONDITIONS

Pressure: $P=0\sim 0.3\text{MPa}$

Temperature: $t=-20^{\circ}\text{C}\sim 100^{\circ}\text{C}$

Speed: $n\leq 5000\text{r/min}$



Type 6CK-16

OPERATING CONDITIONS

Pressure: $P=0\sim 0.3\text{MPa}$

Temperature: $t=-20^{\circ}\text{C}\sim 100^{\circ}\text{C}$

Speed: $n\leq 5000\text{r/min}$

