

**Type 128**  
**Type 128P**

**OPERATING CONDITIONS**


Pressure:  $P=0\sim 0.8\text{MPa}$

Temperature:  $t=-20^{\circ}\text{C}\sim 200^{\circ}\text{C}$

Velocity:  $V_g\leq 10\text{m/s}$



128

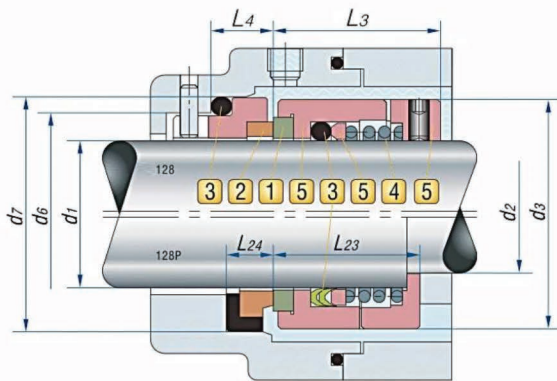

**128 DIMENSIONAL DATA (mm)**

(Size) (Specification)	d1 (h6)	d3 (Max)	d6	d7 (H8)	L3 (±0.5)	L4
128-20	20	34	29	35	35.0	10.0
128-22	22	36	31	37	35.0	10.0
128-25	25	39	34	40	40.0	10.0
128-28	28	42	37	43	40.0	10.0
128-30	30	44	39	45	40.0	10.0
128-35	35	49	44	50	45.0	10.0
128-38	38	54	49	56	44.0	11.0
128-40	40	56	51	58	44.0	11.0
128-45	45	61	56	63	49.0	11.0
128-50	50	66	62	70	47.0	13.0
128-55	55	71	67	75	57.0	13.0
128-60	60	80	72	80	57.0	13.0
128-65	65	85	77	85	57.0	13.0
128-70	70	90	83	92	64.7	15.3
128-75	75	99	88	97	64.7	15.3


**128P DIMENSIONAL DATA (mm)**

(Size) (Specification)	d1 (h6)	d2	d3 (Max)	d6	d7 (H8)	L23 (±0.5)	L24
128P-18	18	14	32	27	33	19.5	6.5
128P-20	20	16	34	29	35	19.5	6.5
128P-22	22	18	36	31	37	22.0	6.5
128P-25	25	20	39	34	40	25.0	8.0
128P-28	28	23	42	37	43	27.5	8.5
128P-30	30	25	44	39	45	27.5	8.5
128P-35	35	30	49	44	50	29.5	8.5
128P-38	38	33	54	49	56	30.5	9.5
128P-40	40	35	56	51	58	30.5	9.5
128P-45	45	40	61	56	63	30.5	9.5




128P

**1 ROTARY FACE**




Reaction Bonded Sic:O  
Nickel Bonded WC:W

**2 STATIONARY SEAT**




T4S43

Resin Impregnated Carbon:Ak



T5S43

Reaction Bonded Sic:O  
Nickel Bonded WC:W



T1A

Reaction Bonded Sic:O  
Nickel Bonded WC:W

**3 AUXILIARY SEAL**

- Fluorocarbon:V
- Ethylene-Propylene:E
- Nitrile:P
- Pure PTFE:T

**4 SPRING**

Chromium-Nickel Steel:F

**5 METAL PATRTR**

Chromium-Nickel Steel:F